

# CLIO

ELECTRICAL & ACOUSTICAL TESTS

## FIREWIRE AUDIO INTERFACE FW-01



### ■ PRODUCT DESCRIPTION

The FW-01 Firewire Audio Interface sets new hardware precision standards for the CLIO System.


The FW-01 unit has been designed to be a complete two channels professional A/D D/A audio front-end for your PC; it is connected to the computer by an IEEE-1394 link giving you maximum performances; it can be powered by the same link giving you maximum portability. The FW-01 performances (24 bit @ 192 kHz) represent state-of-the-art measurement capabilities for any audio device or acoustical test.

The FW-01 is equipped with an instrument grade balanced input and output analog circuitry with an exceptionally wide range of output attenuation and input gain that allows an easy interface to the outer world; the input and output loopback capability with the internal ultra stable voltage reference permit a simple and precise calibration of the whole instrument.

A switchable phantom power supply lets you directly connect an Audiomatica MIC-01, MIC-02, MIC-03 or MIC-04 as well as any other standard balanced microphone to any of the FW-01 input.

### ■ AVAILABLE SOFTWARE

CLIO 11 system software for Windows XP, Vista, 7, 8 or 10.

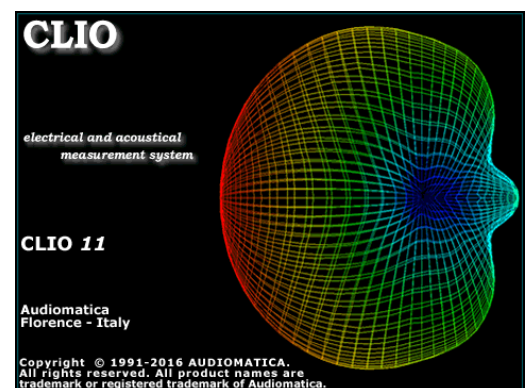

## ■ FW-01 TECHNICAL SPECIFICATIONS

### ■ GENERATOR

Two channels 24 Bit sigma-delta D/A Converter  
Frequency range: 1Hz-90kHz  
Frequency accuracy: >0.01%  
Frequency resolution: 0.01Hz  
Output impedance: 660Ohm  
Max output level (Sine):17dBu (5.5Vrms)  
Attenuation: 0.1 dB steps to full mute  
THD+Noise(Sine):0.008%  
Digital out: SPDIF

### ■ ANALYZER

Two channels 24 bit sigma-delta A/D Converter  
Input range: +40 ÷ -40dBV  
Max input acceptance: +40dBV (283Vpp)  
Input impedance: 128kOhm (5.6kOhm mic)  
Phantom power supply: 24V

### ■ PC SYSTEM RESOURCES

One free IEEE1394 port

### ■ MISCELLANEOUS

Sampling frequencies: 192kHz, 96kHz and 48kHz.  
Audio connections: 2 XLR combo analog input,  
2 XLR plus 2 RCA analog output, 1 RCA digital output  
Digital connection: 6-pin IEEE1394  
Power supply: IEEE1394 or 12V DC  
Dimensions :16(w)x17(d)x4(h)  
Weight: 0.8 kg



---

***Turns your PC into the most complete easy-to-use electrical and acoustical measurement system ....***

---

## ■ PC REQUIREMENTS

- **CLIO 11:** Dual Core 2 GHz, IEEE-1394 400
- **OS:** Windows XP, Vista, 7, 8 or 10



VIA MANFREDI 12 - 50136 FIRENZE-ITALY  
TEL : +39-0556599036 - FAX : +39-0556503772  
E-MAIL: info@audiomatica.com  
WEB: www.audiomatica.com, www.cliosystem.com

# CLIO

**ELECTRICAL & ACOUSTICAL TESTS**